

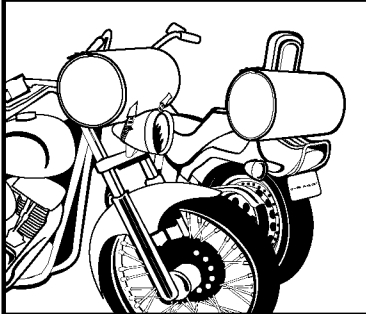


SWITCHBACK


FRONT OR BACK MOUNTING

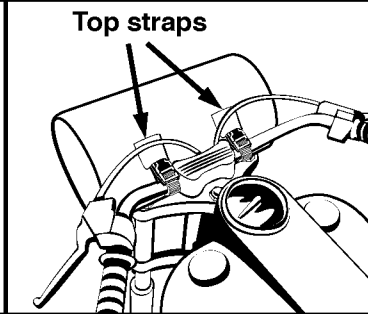

HANDLEBAR MOUNTING

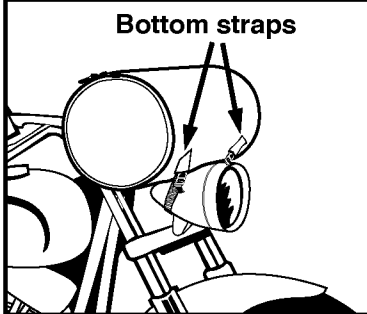

LUGGAGE RACK MOUNTING

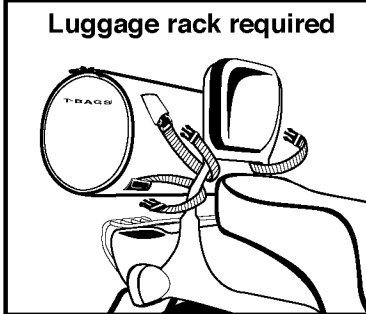


Your Switchback bag is constructed of genuine top grain leather or 1680d Nylon. The exterior has been insulated with 1/4" high density foam and the interior has been stiffened with a removable HDPE insert so it will keep its shape. This bag is designed to mount in front of the handlebars on custom bikes with limited storage space or on the luggage rack behind the passenger backrest on other OEM models. **CAUTION:** If you purchased a 1680 nylon bag, it is made of materials that will scratch and scuff painted surfaces or plastic such as windshields. **Do not place this bag against paint or plastic.** If you purchased a leather bag, we recommend that you do not place it against painted or plastic surfaces because road grime will blow between the bike surface and the bag and as the bike vibrates, it may scratch the surface of your motorcycle.

FOR FRONT MOUNTING: Be sure that your headlight mounting bolt is tightened so the light will not move during motorcycle operation. Place


the bag on top of the headlight, cross the bottom straps under and in front or behind the light mounting block and plug them into the female receptacle on the opposite side. Tie down straps will slip off of smooth headlights if improperly hooked. Be sure to place the straps in front or behind the light mounting bracket so they **"cannot slip off"** during motorcycle operation. After mounting, test by trying to slide straps off prior to riding. **BE CAREFUL NOT TO INTERFERE WITH ELECTRICAL WIRING.** These bottom straps keep the bag from rolling or flipping up while riding. It is **absolutely necessary** to use these straps, as shown, for proper mounting and safe riding. Motorcycles with gauges mounted on top of, or forward of, the top center of the handlebars may not be able to use this bag. It is designed to rest on top of the (unpainted) headlight and be low enough that the back of the bag rests against the front of the handlebars, and not on top of them. **AS AN ALTERNATIVE,** you may lace each strap under the light and "around" the mounting bracket. Then, rather than crossing the straps, bring each strap back and plug it into its own female receptacle. **DO NOT** use this bag if your motorcycle headlamp beam or clear road vision will be blocked or obscured while riding. Lace the two top straps around the handlebars **making sure** that the tie down straps do not interfere with any cables or other lines which might restrict or limit full left and right turning abilities or other normal motorcycle steering operations. Tighten all four straps snugly to position the bag as desired and recheck turning capabilities and all other equipment to be sure the tie downs do not interfere with normal motorcycle operations. If the bag deforms, the straps are too tight. When mounted properly, this bag will be tight on the handlebars and very stable during the ride. If the bag is not mounted in accordance with these instructions or is not "tight" on the motorcycle, **DO NOT RIDE WITH IT.**

FOR LUGGAGE RACK/PASSENGER BACKREST MOUNTING-LUGGAGE RACK REQUIRED: Place the bag on the luggage rack so the carrying handle is down against the rack. Lace the angled straps (used for the headlight in the front mounting position) around the steel backrest uprights as shown above. Next lace the two remaining straps under the bag and toward the front of the bike. Wrap each strap around the corresponding steel backrest upright, (do not cross straps) bring them back and plug them into their own female receptacle. Tighten all straps until snug only. Over tightening may deform the bag. After mounting, all straps must be tied off to avoid entanglement or once you have determined the proper length straps for your bike configuration, you may cut off any excess and burn the end with a lighted match to seal it to avoid fraying. **CAUTION:** Do not cut the straps too short! The straps need to be longer for back mounting than for front mounting. There are two small pockets sewn below the tie down straps. Before using the shoulder sling for carrying, pull the headlight straps tight and then fold the other two straps over themselves and tuck them into the pockets for a cleaner look while carrying the bag. Even though T-Bags vinyl backed material and leather are fully weather resistant, and our high density foam absorbs virtually no moisture, (ensuring against mildew) the zippers and seams may allow a small amount of moisture to enter during rainy weather. Our internal drawstring rain and dust cover has been built into the bag for added protection, but a plastic bag liner is recommended for absolute weather protection. Road grime? If you purchased a leather bag, use leather care products. Do not wash the leather, or 1680 nylon bag in a washing machine. If you purchased a 1680 nylon bag, it may be cleaned by using a sponge with light solution of soap and water. **DO NOT PUT THE BAG IN AN AUTOMATIC DRYER.** **NOTICE:** When purchased through an authorized T-Bags dealer, all CDL ENTERPRISES, LTD., products are warranted to be free from all manufacturing defects in materials and workmanship for the normal life of the product. This Lifetime Warranty does not cover damage resulting from abuse, neglect, improper use, common carrier damage or normal wear and tear. **Do Not ride with bag against painted or plastic surfaces because it will scuff the paint. Luggage rack required.** CDL ENTERPRISES, LTD., its distributors and dealers issue no warranty and assume no liability for damage caused by use of this product other than as recommended. Load only in compliance with your vehicle owner's manual. PATENT NO. 6,123,239 Other Patents Pending

CONVENIENT POCKETS FOR STRAP STORAGE

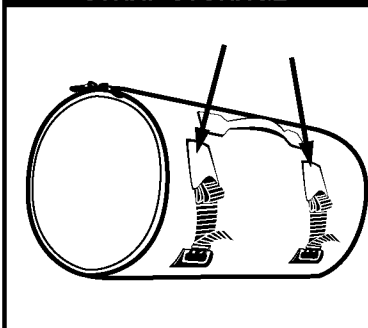

SHOULDER SLING AND CARRYING HANDLE

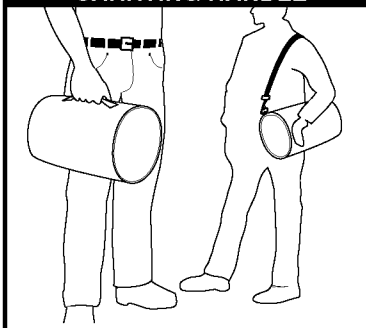

WARNING: All straps must be connected and tied off. A dislodged bag and/or loose straps may become entangled in moving parts of the motorcycle, cause loss of control and result in serious injury or death.